

Peacock XT-355 MW

Integrated, High-Repetition Rate,
Tunable Laser-OPO System



The **Peacock XT-355 MW** extends our all-integrated Laser-OPO series by high-repetition rate devices. The diode pumped solid state (DPSS) laser source is available from **50 Hz to 200 Hz**, providing high average power with **high energy nanosecond pulses** with continuous **VIS to Mid-IR wavelength coverage**. Our new and unique automated tuning offers **fast shot-to-shot wavelength switching** across the entire tuning range. **Energy measurement and attenuation** as well as **fiber-coupling** capability are integral parts of the Peacock XT series. Our robust all-solid-state technology provides intuitive features and interfaces that allow for easy **OEM machine integration** as well as for convenient usage in **research labs**. The rugged and turn-key design, paired with an intuitive GUI and programming interface, ensure convenient usability and best reliability.

The Peacock XT consists a 355 nm pumped **Laser-OPO package**, **seamlessly integrating** Quantel’s Merion MW DPSS laser series. Nanosecond pulses with a **peak energy of up to 65 mJ** in the **405 nm to 2850 nm** wavelength range at 50 Hz, 100 Hz or 200 Hz are available.

The PEACOCK series tunable Lasers are joint products of **GWU-Lasertechnik** and **Quantel Lasers by Lumibird**, combining decades of experience in Lasers and nonlinear optics.

Peacock XT-355 MW Specification

Peacock XT-355						
	MW7-100/BB	MW7-200/BB	MW9-50/BB	MW7-100/MB	MW7-200/MB	MW9-50/MB
Repetition Rate [Hz]	100	200	50	100	200	50
Output Energy [mJ] ⁽¹⁾	27 ⁽¹⁾	15 ⁽¹⁾	65 ⁽¹⁾	24 ⁽²⁾	13 ⁽²⁾	60 ⁽²⁾
Beam Diameter at Exit Aperture [mm]	< 7		< 9.5		< 7	< 9.5
Tuning Range Signal Wave [nm]	405 – 680			405 - 2850		
Tuning Range Idler Wave [nm]	740 - 2650					
Linewidth	< 0.3 – 15 nm ⁽³⁾			< 4.5 cm ⁻¹		
Divergence (hor. / vert.) ⁽⁴⁾	<8 mrad / < 10 mrad			< 6 mrad / < 1.5 mrad		
OPO Pulse Width	< 7 ns					

Features and Benefits

- All integrated Laser-OPO platform
- Fast, shot-to-shot wavelength tuning
- Real-time OPO energy signals
- Fully automated for hands-free operation
- Fiber-delivery or free-space output
- Integrated wavelength measurement
- Soft pumping scheme for high reliability and long lifetime

- Applications
- Medical & Biotechnology
 - Photoacoustic Imaging
 - Spectroscopy
 - Remote Sensing
 - LIDAR

Notes

All specifications are subject to change without notice. The Peacock is a joint product of GWU-Lasertechnik and Quantel by Lumibird.




⁽¹⁾: Peak at 450 nm ± 10 nm ⁽²⁾: Peak at 425 nm ± 10 nm ⁽³⁾: Depends on wavelength ⁽⁴⁾: Full angle, at FWHM


Peacock XT-355 MW Performance

Typical performance, not a guaranteed or warranted specification

Peacock XT-355/MW/BB: Typical output

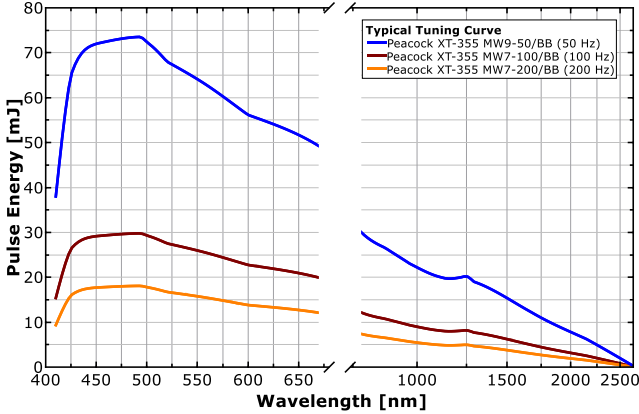


Peacock XT-355/MW/MB: Typical output

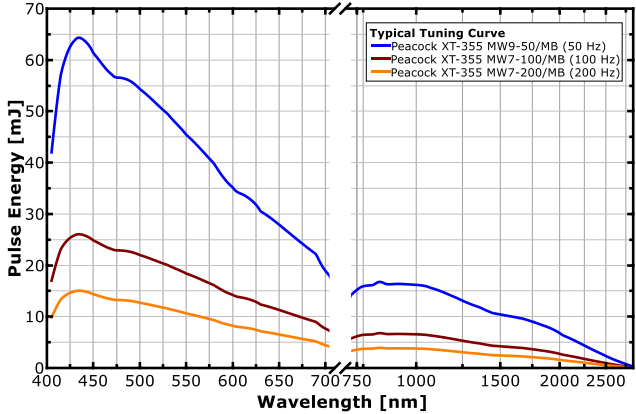


Peacock XT-355 MW Dimensions

Laser Head

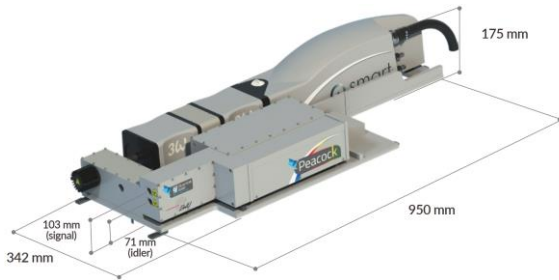

Electronics

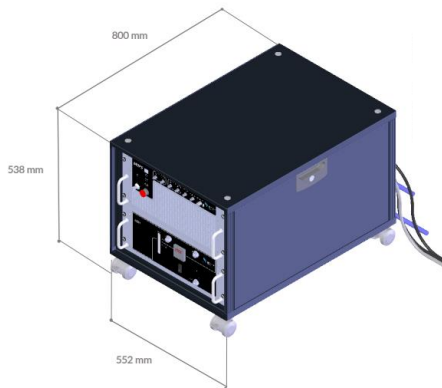

Mechanical + Utilities

Size OPO body
(L x W x H):
950 x 342 x 175 mm³

For dimensions with feet,
and other protruding
elements please refer to
the dimensional drawing

Electric requirements
Power supply: 200-240
VAC, 50/60 Hz, 1600 VA.
Cooling group: 200-240
VAC, 50/60 Hz, 2200 VA.

Cooling: water to water

Cable Length: 3 m

Diode Warranty:
5 billion shots

GWU-Lasertechnik Vertriebsges. mbH

Bonner Ring 9
50374 Ertstadt
Germany

Fon +49.(0) 22 35.9 55 22-0
Fax +49.(0) 22 35.9 55 22-99

info@gwu-lasertechnik.de

www.gwu-lasertechnik.de

